


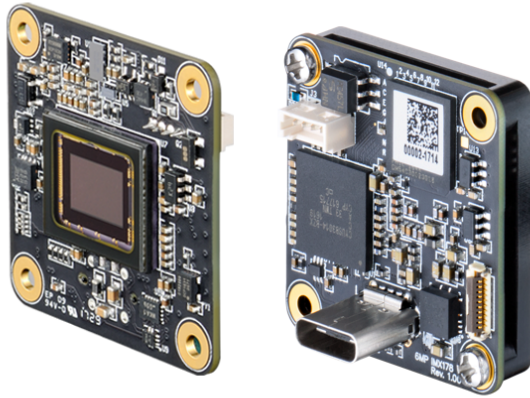

37U Series DMM 37UR0234- ML

- AR0234CS CMOS Sensor
- 2.3 MP
- USB3 Vision / UVC compliant
- Trigger and I/Os
- M12x0.5 mount

The 37U series camera DMM 37UR0234-ML with a onsemi AR0234CS sensor delivers 100 frames per second with a resolution of 1920x1200 (2.3 MP).

The Imaging Source's 37 Series board-level cameras feature a range of Sony and onsemi sensors with resolutions up to 12MP, as well as trigger, I/O, and connector options, providing maximum flexibility for developers and OEMs. The cameras' small footprint and reversible USB-C connector make them well-suited for space-constrained designs for applications in industrial automation, mobile robotics, and medical equipment.

The USB3 Vision standard allows for rapid integration into new and existing applications via The Imaging Source's [IC Imaging Control 4 SDK](#) as well as most other third-party image processing libraries.

Note: This Data Sheet is intended to provide a summary overview for an individual camera model.

The Imaging Source's website also offers information on spectral sensitivity, dimensional diagrams, sensor data sheets, STEP files as well as our full product catalog. For comprehensive technical information, please refer to the Technical Reference Manual specific to each camera model.


www.theimagingsource.com

1 Quick Facts

General	
Vision Standard	USB3 Vision (UVC compliant)
Dynamic Range	10 bit
Resolution	1920x1200
Frame Rate at Full Resolution	100
Optical Interface	
IR-Cut filter	No
Sensor Type	onsemi AR0234CS
Shutter Type	Global
Sensor Format	1/2.6 inch
Pixel Size	3.0 μ m
Lens Mount	M12x0.5
Electrical Interface	
Interface	USB 3.1gen1
Supply Voltage	4.75 VDC to 5.25 VDC
Current Consumption	approx 270 mA @ 5 VDC
Mechanical Data	
Dimensions	H: 30 mm, W: 30 mm, L: 15 mm
Mass	7 g
Environmental Conditions	
Temperature (operating)	-5 °C to 45 °C
Temperature (storage)	-20 °C to 60 °C
Humidity (operating)	20 % to 80 % (non-condensing)
Humidity (storage)	20 % to 95 % (non-condensing)

2 Dimensional Diagrams

2.1 DMM 37UR0234-ML

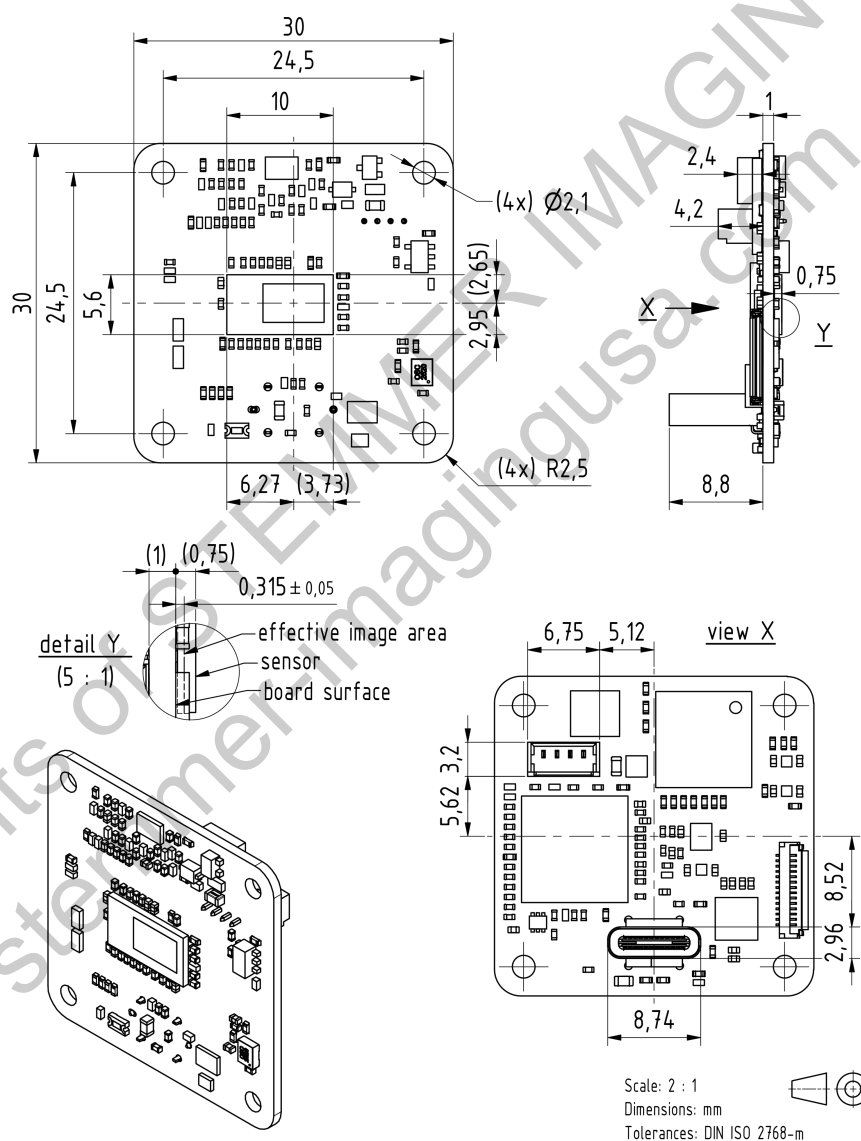

3 Spectral Characteristics

3.1 Spectral Sensitivity - AR0234CS

Sensor: ON Semiconductor AND9658/D - *courtesy of ON Semiconductor*

