

Genie HC640

Area Scan Color Cameras



Key Features

- Uses standard PC and server Ethernet ports & hardware
- Facilitates cable lengths up to 100 m (CAT-5e or CAT-6)
- Simplified set-up with field proven Sapera Essential software featuring CamExpert
- Engineered to accommodate industrial environment with a Ruggedize, screw mount, RJ-45 connector
- Small compact form factor
- Teledyne DALSA Platform Development Advantage – Free Run-time Licensing¹

Programmability

- Achieve 300 fps in full resolution
- Higher frame rates achievable in partial scan mode
- Global electronic shutter with exposure control
- On-board flat-field correction
- 1000x antiblooming

Typical Applications

- Electronics manufacturing inspection
- Industrial metrology
- Intelligent traffic systems
- Food Inspection

Overview

Extreme high speed acquisition with uncompromised image quality.

The Genie HC640 offers unprecedented high speed image acquisition with uncompromised signal-to-noise ratio, significantly optimizing the opportunity for increased yield. Teledyne DALSA's proprietary sensor technology allows for image capture rates of 300 fps in VGA resolution while maintaining exceptional image quality. The Genie HC640's gigabit Ethernet interface takes full advantage of this Genie's high frame rate by transmitting data over standard CAT-5e and CAT-6 cables to distances of up to 100 m. Like all Genies, the HC640 is based on the AIA (Automated Imaging Association) GigE Vision Standard to directly link the camera to a PC.



Active Resolution	640 x 480
Frame Rate	300 fps
Pixel Size	7.4 μ m
Data Format	8-bits Raw Bayer
Exposure Control	Programmable, or via External Trigger
Dynamic Range	48 dB
Nominal Gain Range	0 dB to +12 dB
Output	Gigabit Ethernet, also supports 100 Mbps
I/O Ports	2 opto-isolated input, 2 opto-isolated output
Lens Mount	C or CS-mount / Right-Angle option is also available
Size	44 mm x 29 mm x 67 mm (including lens adapter)
Mass	~115 g (without lens)
Operating Temp	0°–45°C
Power Supply	12 to 24V
Power Dissipation	4W
Data Connector	Standard or Screw mount RJ-45
Power and I/O	Hirose 12-Pin
Software Platform	Teledyne DALSA Sapera LT
GigE Vision Compliant	Yes
Regulatory Compliance	FCC Class A, CE, RoHs 2002/95/EC
Part Number	CR-GC00-H640x

Teledyne DALSA Platform Development Advantage - Free Run-Time Licensing


The Sapera Essential standard processing tool run-time license is offered at no additional charge when combined with the Teledyne DALSA frame grabbers. This software run-time license¹ includes access to over 400 image processing functions, area-based (normalized correlation based) template matching tool, blob analysis and lens correction tool.

¹ Some conditions and limitations apply, contact Teledyne DALSA sales for details.


Genie HC640

Area Scan Color Cameras

All Genie cameras feature value added functionality designed specifically for imaging and machine vision applications. All features are easily accessible with Teledyne DALSA's advanced software tools. These tools deliver superior image capture, performance, and control.

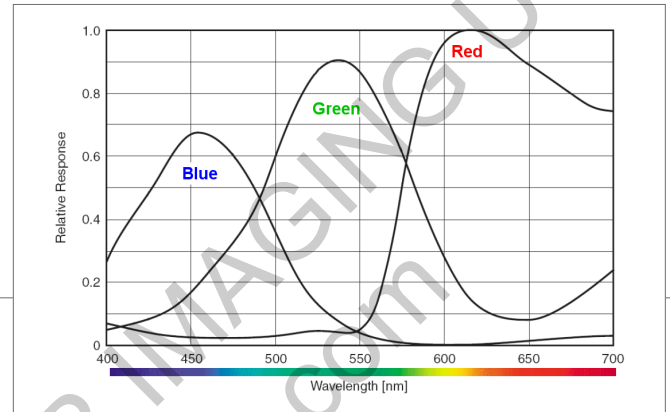

C or CS-mount: 1" diameter
32 threads per inch

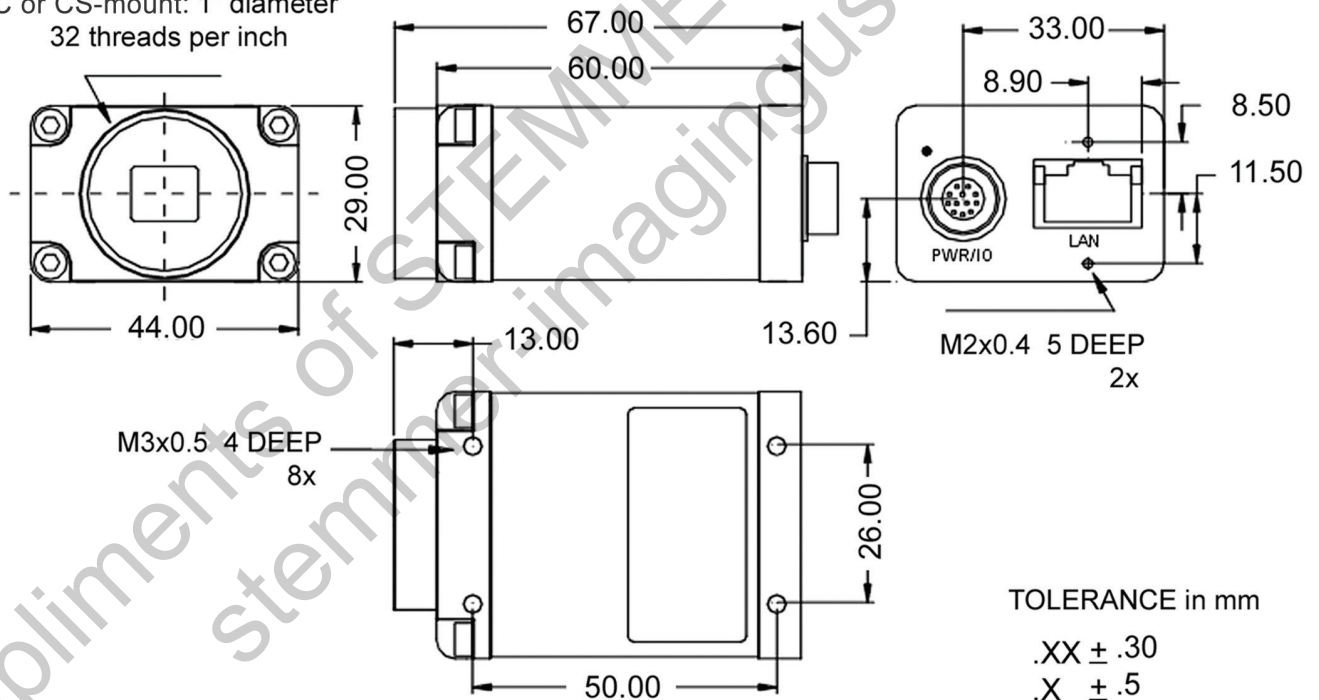

www.teledynedalsa.com

Americas

Boston, USA
 Tel: +1 978-670-2000
sales.americas@teledynedalsa.com

Europe

Munich, Germany
 Tel: +49 8142-46770
sales.europe@teledynedalsa.com

Asia Pacific

Tokyo, Japan
 +81 3-5960-6353
sales.asia@teledynedalsa.com

Teledyne DALSA is an international leader in digital imaging and semiconductors and has its corporate offices in Waterloo, Ontario, Canada.

All trademarks are registered by their respective companies. Teledyne DALSA reserves the right to make changes at any time without notice. © Teledyne DALSA 2011. genie_hc640_092410

TELEDYNE DALSA
 A Teledyne Technologies Company