

■ 4112 x 3008

■ 64 fps

Spark Series 



▶ **SP-12400-PMCL** 12.4 megapixel CMOS area scan



- **High resolution 12-megapixel CMOS imager (global shutter)**
- **64.6 fps at full resolution**
- **3.45 μm square pixels**
- **User selectable ROI and multi-ROI functions**
- **Horizontal and vertical binning (monochrome model) for increased sensitivity**
- **Edge enhancement function**
- **Shading/blemish compensation, gamma correction, lookup table and more**
- **Excellent shock and vibration resistance**
- **8/10/12-bit* output over GenICam-compliant Camera Link 2.0 interface**
- **Supports power over Camera Link or via separate 12-pin connector**
- **C-mount lens mount**

* Some video processing functions not available with 12-bit output



Specifications for SP-12400-PMCL

Spark Series

Specifications	SP-12400-PMCL
Sensor	1.1" CMOS global shutter (IMX253)
Active pixels	4112 x 3008 or 4080 x 3008, depending on tap geometry
Frame rate, full frame	64.6 frames/sec. @ 8-bit (1x10_1Y)
Active area	14.2 mm (h) x 10.4 mm (v) - 17.6 mm diagonal
Pixel size	3.45 µm x 3.45 µm
Camera Link clock	37.1 / 74.3 / 84.9 MHz
System clock	74.25 MHz (for pulse generator)
Read-out modes	Full ROI (single) ROI (multi) Binning
	4112 (h) x 3008 (v) up to 64.6 fps H: 96 to 4112 pixels in 16 pixel steps V: 8 to 3008 lines in 4 line steps Up to 64 areas can be defined (non-overlapping). 1x2, 2x1, 2x2
EMVA 1288 Parameters	10-bit output format
Absolute sensitivity	Mono: 3.50 p Color: 4.00 p ($\lambda = 525$ nm)
Maximum SNR	Mono: 40.03 dB Color: 40.10 dB
Traditional SNR*	>60 dB (0 dB gain, 10-bit)
Video signal output	Monochrome: 8/10/12-bits [†] Color: 8/10/12-bit Bayer [†]
Video modes	Normal/ROI, Multi ROI, Sequencer (2)
Gain	Manual/auto 0 dB to +24 dB
White balance	Off, 4 presets (3200K, 5000K, 6500K, 7500K), or one-push/continuous AWB (3000K to 9000K)
Gamma/LUT	0.45 to 1.0 (9 steps) or 257-point programmable LUT
Shading correction	Flat shading, color shading
Trigger input	TTL, Camera Link (CC1), Opto In (2), Pulse Generators (4), Software, NAND Out (2), User Output (4)
Exposure modes	Timed/EPS, RCT, Trigger Width, Auto
Electronic shutter	Timed: 15.26 µs to 8 s Trigger width: 15.26 µs to ∞ s
Auto Level Control (ALC)	Shutter range from 100 µs to 1/frame rate, gain range from 0 dB to +24 dB. Tracking speeds and max. values adjustable.
Pre-processing functions	Edge enhancer, blemish compensation (800 pixels)
Operating temp. (ambient)	-5°C to +45°C (20 to 80% non-condensing)
Storage temp. (ambient)	-25°C to +60°C (20 to 80% non-condensing)
Vibration	10G (20 Hz to 200 Hz, XYZ directions)
Shock	80G
Regulations	CE (EN61000-6-2, EN61000-6-3) FCC Part 15 Class B, RoHS/WEEE
Power	12-pin PoCL +12V to +24V DC ± 10%, 5.1 W typical @ +12 V +10V to +13 V DC, 5.2 W typical @ +12 V
Lens mount	C-mount
Dimensions (H x W x L)	44 mm x 44 mm x 44 mm (excl. connectors)
Weight	135 g


Ordering Information

SP-12400M-PMCL	Monochrome camera with Camera Link
SP-12400C-PMCL	Color camera with Camera Link


*Traditional SNR is based on random noise in a single frame, where EMVA SNR measurements consider more comprehensive noise sources and variance over time.

[†]12-bit output available in video processing bypass mode. See manual for details.

Dimensions

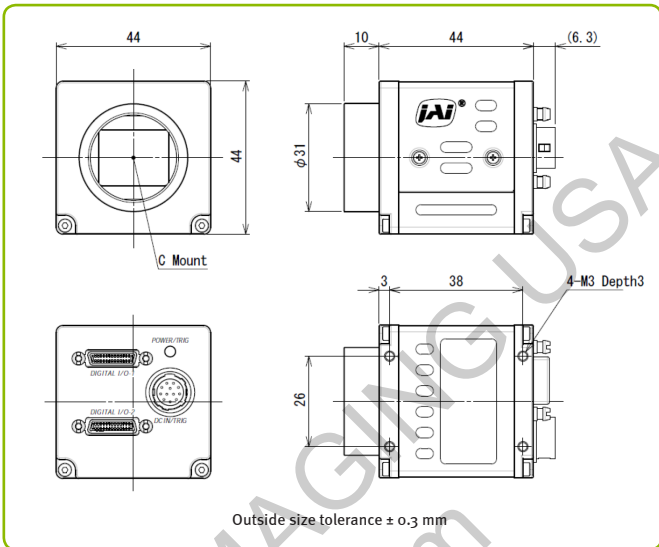


Connector pin-out

DC In / Trigger		Min-CL Interface			
					
HIROSE HR10A-10R-12PB(71)					
Pin		Pin	Signal	Function	
1	Ground	1	26	Power	
2	DC in +12V to +24V	2	15	X0-/X0+	CL Data
3	Opto In 2-	3	16	X1-/X1+	CL Data
4	Opto In 2+	4	17	X2-/X2+	CL Data
5	Opto In 1-	5	18	Xclk-/Xclk+	CL Clk
6	Opto In 1+	6	19	X3-/X3+	CL Data
7	Opto Out 1-	7	20	SerTC-/SerTC-	Serial in
8	Opto Out 1+	8	21	SerTFG-/SerTFG+	Serial out
9	TTL out 1	9	22	CC1-/CC1+	Trigger*
10		10	23	CC2-/CC2+	Reserved
11	DC in +12V to +24 V	11	24	CC3-/CC3+	Not used
12	Ground	12	25	CC4-/CC4+	Not used
		13	14	GND	

*Via Camera Link or 12-pin/10-pin connectors

Note:
Camera Link Base configuration shown. For other configurations, refer to Camera Link specifications or operation manual.

Spectral response

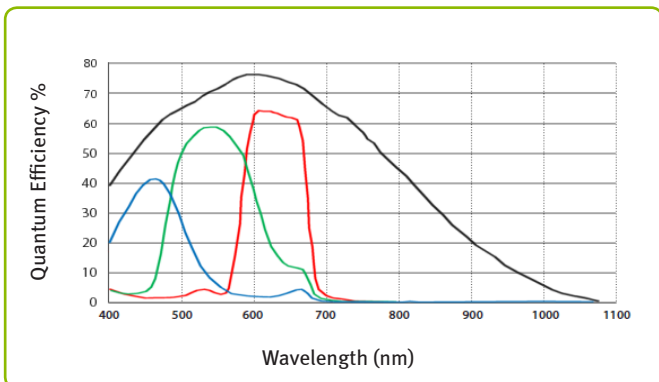

Company and product names mentioned in this datasheet are trademarks or registered trademarks of their respective owners. JAI A-S cannot be held responsible for any technical or typographical errors and reserves the right to make changes to products and documentation without prior notice.

Europe, Middle East & Africa
Phone +45 4457 8888
Fax +45 4491 8880

Asia Pacific
Phone +81 45 440 0154
Fax +81 45 440 0166

Americas
Phone (Toll-Free) 1 800 445 5444
Phone +1 408 383 0300

Visit our website on www.jai.com

See the possibilities



October 12, 2018